



## OASIS INSULATION why Oasis Spas are Different

Save money on your energy bill

### THERMAL LOCK







#### **Oasis Spas Thermal Lock R18 System**

_	T	<u> </u>	<u> </u>	
Insulation Solution	Skirt Thermal Lock	SPA Base Thermal Lock	In Spa Insulation	Features
RX Cabinet Insulation	Dual-aluminum soft wool(3mm) + one-layer PE wool(15mm)	One-layer dual-aluminum soft wool(3mm)	full soft foam insulation sprayed onto the inside of the spa not only holding pipework in place but giving high energy efficiency	Reliable thermal solution with basic insulation to lock the heat inside the spa within the cabinet.
HE / SWIM Overall Thermal lock	Dual-aluminum soft wool(3mm) + one-layer PE wool(15mm)	One-layer dual-aluminum soft wool(3mm)	full soft foam insulation sprayed onto the inside of the spa not only holding pipework in place but giving high energy efficiency	Reliable and most widely used thermal solution with extra insulation on the bottom, providing a higher efficiency heat lock function.













## Model AS-40D



#### **Ultimate swim** experience

Our exclusive "Turbo Jets" are unlike any other on the market, providing a smooth and straight water stream, giving user unbeatable swim experience.



#### TY SWIM

#### INTERNATIONAL MANUFACTURER

Seats / Stand ups	3 / 1
Hydro Jets / Air Jets / swim	jets 46 + 12 + 4 Total 62
Spa performance pump	x2 3HP x2 2HP x1 Circ
Swim Spa music	IN. Stream and Sub
Multi colour LED light	Yes
Gecko controller Touch IN.1	1001 + IN.YT7 Yes
ABS Plastic sealed base	Yes
Maintenance free cabinet	Yes
Stainless steel heater	4 kW
Galvanized steel frame	Yes
High density lockable cover	Yes
Perimeter LED	Yes
Shell foam insulation	6 layer shell with 10mm High form
Side skirt insulation Ful	l Foam & 15mm Dual-aluminum foil
Ozone water unit & mixing	tube Yes
American acrylic	Yes






































# The Build with Oasis Spas Difference Step by Step to perfection



10mm High density insulation foaming on the spa shell

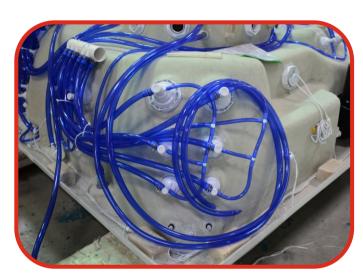

\*High quality NSF piping with IPS glue with spring clips #only on HE range



Tough build treated timber frame with triple reinforced corners & cross bracing supports



Most important the Full high density Soft PE foaming with a massive **R18 rating** 














- American made Aristech/Lucite acrylic surface
- Hand painted pure vinyl ester resin for adhesion
- Sprayed layer of vinyl ester resin/fibreglass composite.
- Marine grade polyester resin/fibreglass composite for strength.
- 5 2nd layer of polyester resin/fibreglass composite.
- High density closed cell (waterproof) foam insulation



8-10 mm 6-layer sheet structuring, Upto 8 years warranty policy\*. Minimized possibility in disruption, blistering, or separation. Functional from -40 to 70 degrees.













